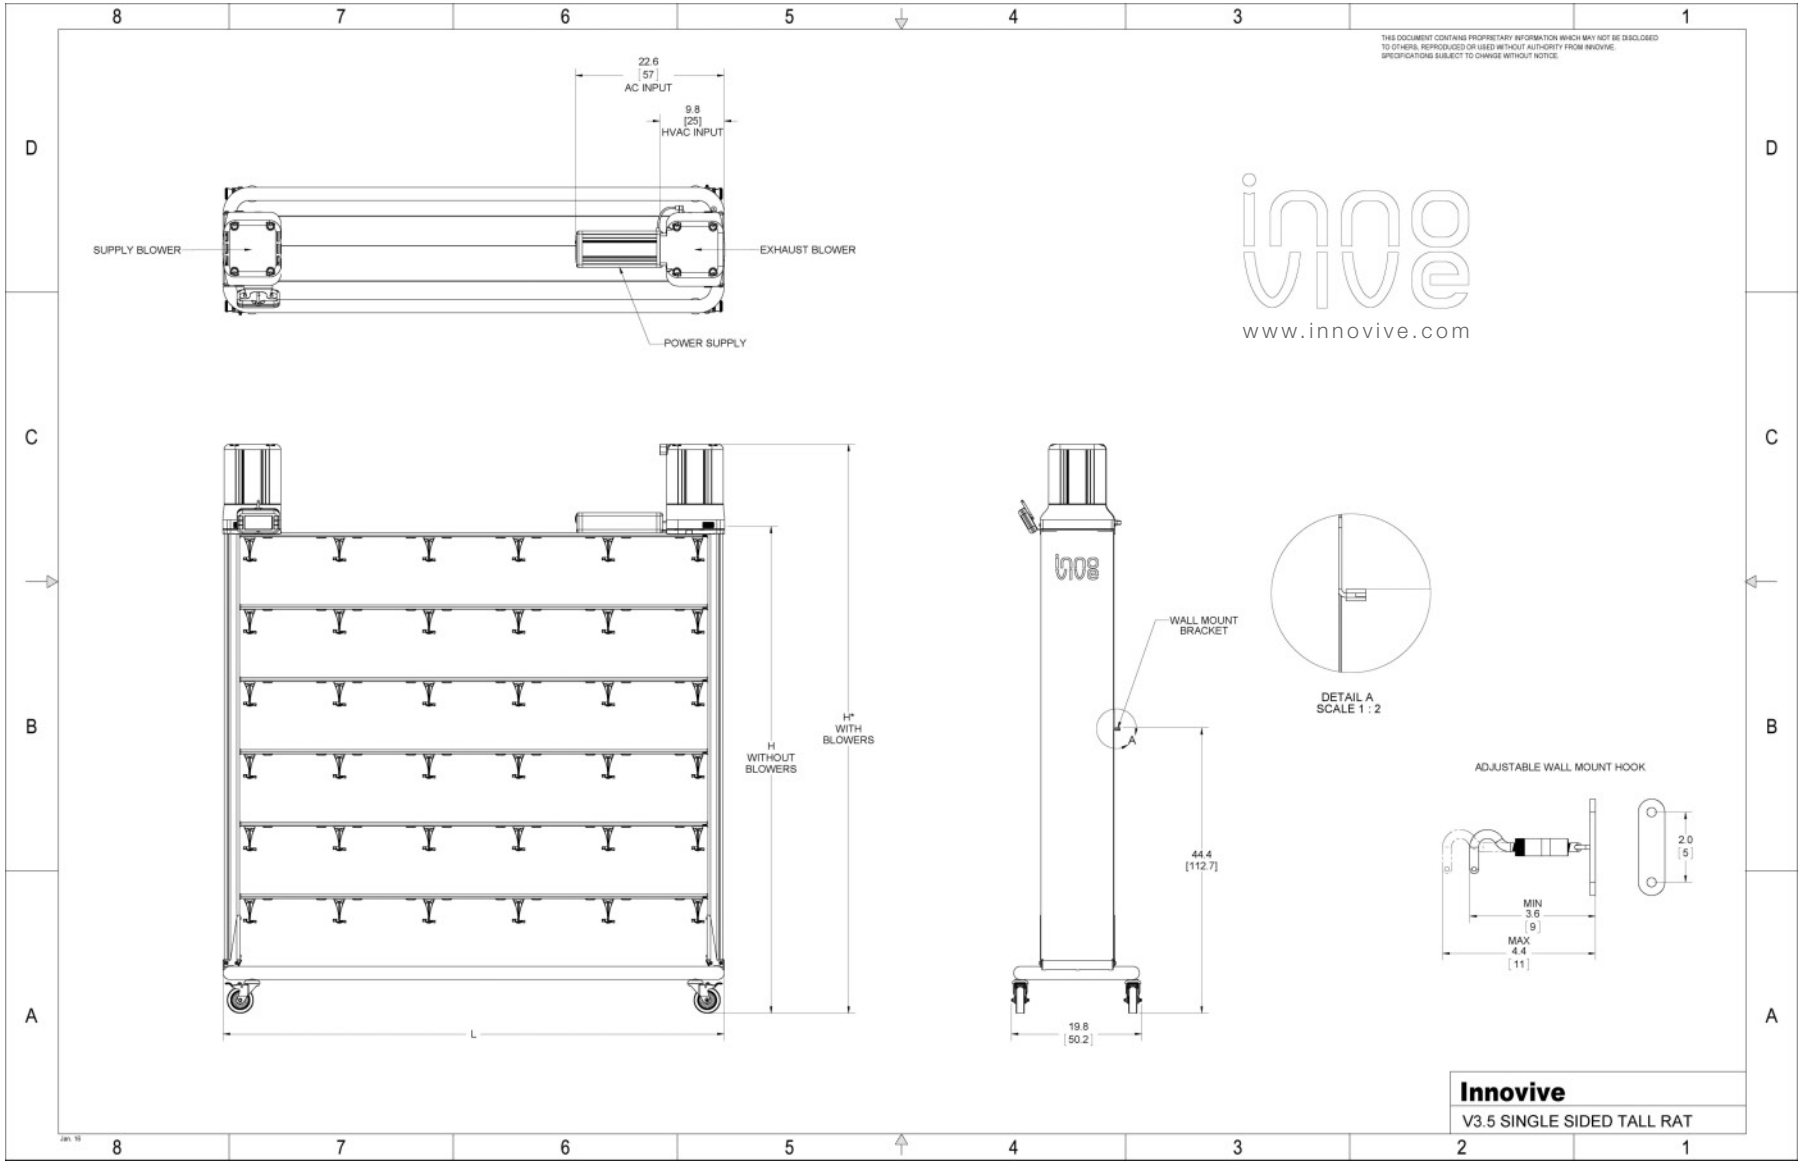
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH MAY NOT BE DISCLOSED TO OTHERS, REPRODUCED OR USED WITHOUT AUTHORITY FROM INNOVIVE. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
22.6
[57]
AC INPUT
9.8
[25]
HVAC INPUT
SUPPLY BLOWER
EXHAUST BLOWER
POWER SUPPLY
www.innovive.com
H
WITHOUT
BLOWERS
H*
WITH
BLOWERS
L
WALL MOUNT
BRACKET
A
44.4
[112.7]
19.8
[50.2]
DETAIL A
SCALE 1 : 2
ADJUSTABLE WALL MOUNT HOOK
2.0
[5]
MIN
3.6
[9]
MAX
4.4
[11]
Innovive
V3.5 SINGLE SIDED TALL RAT

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH MAY NOT BE DISCLOSED TO OTHERS, REPRODUCED OR USED WITHOUT AUTHORITY FROM INNOVIVE. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

PRODUCT	3.5 SINGLE-SIDED INNORACK IVC TALL RAT
POWER SUPPLY ELECTRICAL INPUT SPECIFICATIONS	VOLTAGE RANGE(1): 85-264VAC FREQUENCY RANGE: 47-63HZ AC CURRENT(TYP.): 7.6A/115VAC, 3.6A/230VAC
OPERATIONAL AC CURRENT(TYP.)(2)	.6-2.5A/120VAC, .3-1.25A/240VAC
PLUG TYPE	NEMA 5-15 PLUG/US, CEE 7/7 PLUG/EUROPE AND IEC 320 C13 LOCKING CONNECTOR
LENGTH OF CORD	US: 108IN [274CM] EUROPE: 78.7IN [200CM]

(1) DERATING MAY BE NEEDED UNDER LOW INPUT VOLTAGES.
(2) VARIES DEPENDING ON RACK SIZE, ACH AND CONDITION OF BLOWER FILTER COMPONENTS.
(3) MEASUREMENTS LISTED ARE +/-0.5".
(4) TO ENSURE BEST RESULTS A THIMBLE OR ADJUSTABLE VALVE SHOULD BE INSTALLED AT EACH CEILING DROP
- HVAC VALUES ARE BASED ON RACK RUNNING AT MAXIMUM NEGATIVE AIRFLOW SETTING.

(5) PLEASE CONTACT INNOVIVE FOR MORE INFORMATION.

PRODUCT CODE	COLUMNS	ROWS	CAGE POSITIONS	LENGTH (L)(3)		HEIGHT WITHOUT BLOWERS (H)(3)		HEIGHT WITH BLOWERS (H*)(3)		WEIGHT WITHOUT CAGES		HVAC(4)
				inches (in)	centimeters (cm)	inches (in)	centimeters (cm)	inches (in)	centimeters (cm)	pounds (lbs)	kilograms (kg)	cubic feet per min (CFM)
RS35T-4-6-24	4	6	24	62.66	159.1	74.50	189.2	89.25	226.7	203	92.3	83
RS35T-5-5-25	5	5	25	76.25	193.7	63.50	161.3	78.25	198.8	198	90.0	85
RS35T-5-6-30	5	6	30	76.25	193.7	74.50	189.2	89.25	226.7	224	102	94

Innovive
V3.5 SINGLE SIDED TALL RAT


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH MAY NOT BE DISCLOSED TO OTHERS, REPRODUCED OR USED WITHOUT AUTHORITY FROM INNOVIVE. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
22.6
[57]
AC INPUT
9.8
[25]
HVAC INPUT
SUPPLY BLOWERS
EXHAUST BLOWERS
POWER SUPPLY
www.innovive.com
H*
WITH BLOWERS
H
WITHOUT BLOWERS
L
36.3
[92]
Innovive
V3.5 DOUBLE SIDED TALL RAT

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH MAY NOT BE DISCLOSED TO OTHERS, REPRODUCED OR USED WITHOUT AUTHORITY FROM INNOVIVE.
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

PRODUCT	V3.5 DOUBLE-SIDED INNORACK IVC TALL RAT
POWER SUPPLY ELECTRICAL INPUT SPECIFICATIONS	VOLTAGE RANGE[1]: 85-264VAC FREQUENCY RANGE: 47-63HZ AC CURRENT (TYP.) 7.6A/115VAC, 3.6A/230VAC
OPERATIONAL AC CURRENT (TYP.)[2]	1.4-5A/120VAC, .7-2.5A/240VAC
PLUG TYPE	NEMA 5-15 PLUG/US, CEE 7/7 PLUG/EUROPE AND IEC 320 C13 LOCKING CONNECTOR
LENGTH OF CORD	US: 108IN [274CM] EUROPE: 78.7IN [200CM]

(1) DERATING MAY BE NEEDED UNDER LOW INPUT VOLTAGES.
(2) VARIES DEPENDING ON RACK SIZE, ACH AND CONDITION OF BLOWER FILTER COMPONENTS.
(3) MEASUREMENTS LISTED ARE +/-0.5".
(4) TO ENSURE BEST RESULTS A THIMBLE OR ADJUSTABLE VALVE SHOULD BE INSTALLED AT EACH CEILING DROP
- HVAC VALUES ARE BASED ON RACK RUNNING AT MAXIMUM NEGATIVE AIRFLOW SETTING.

(5) PLEASE CONTACT INNOVIVE FOR MORE INFORMATION.

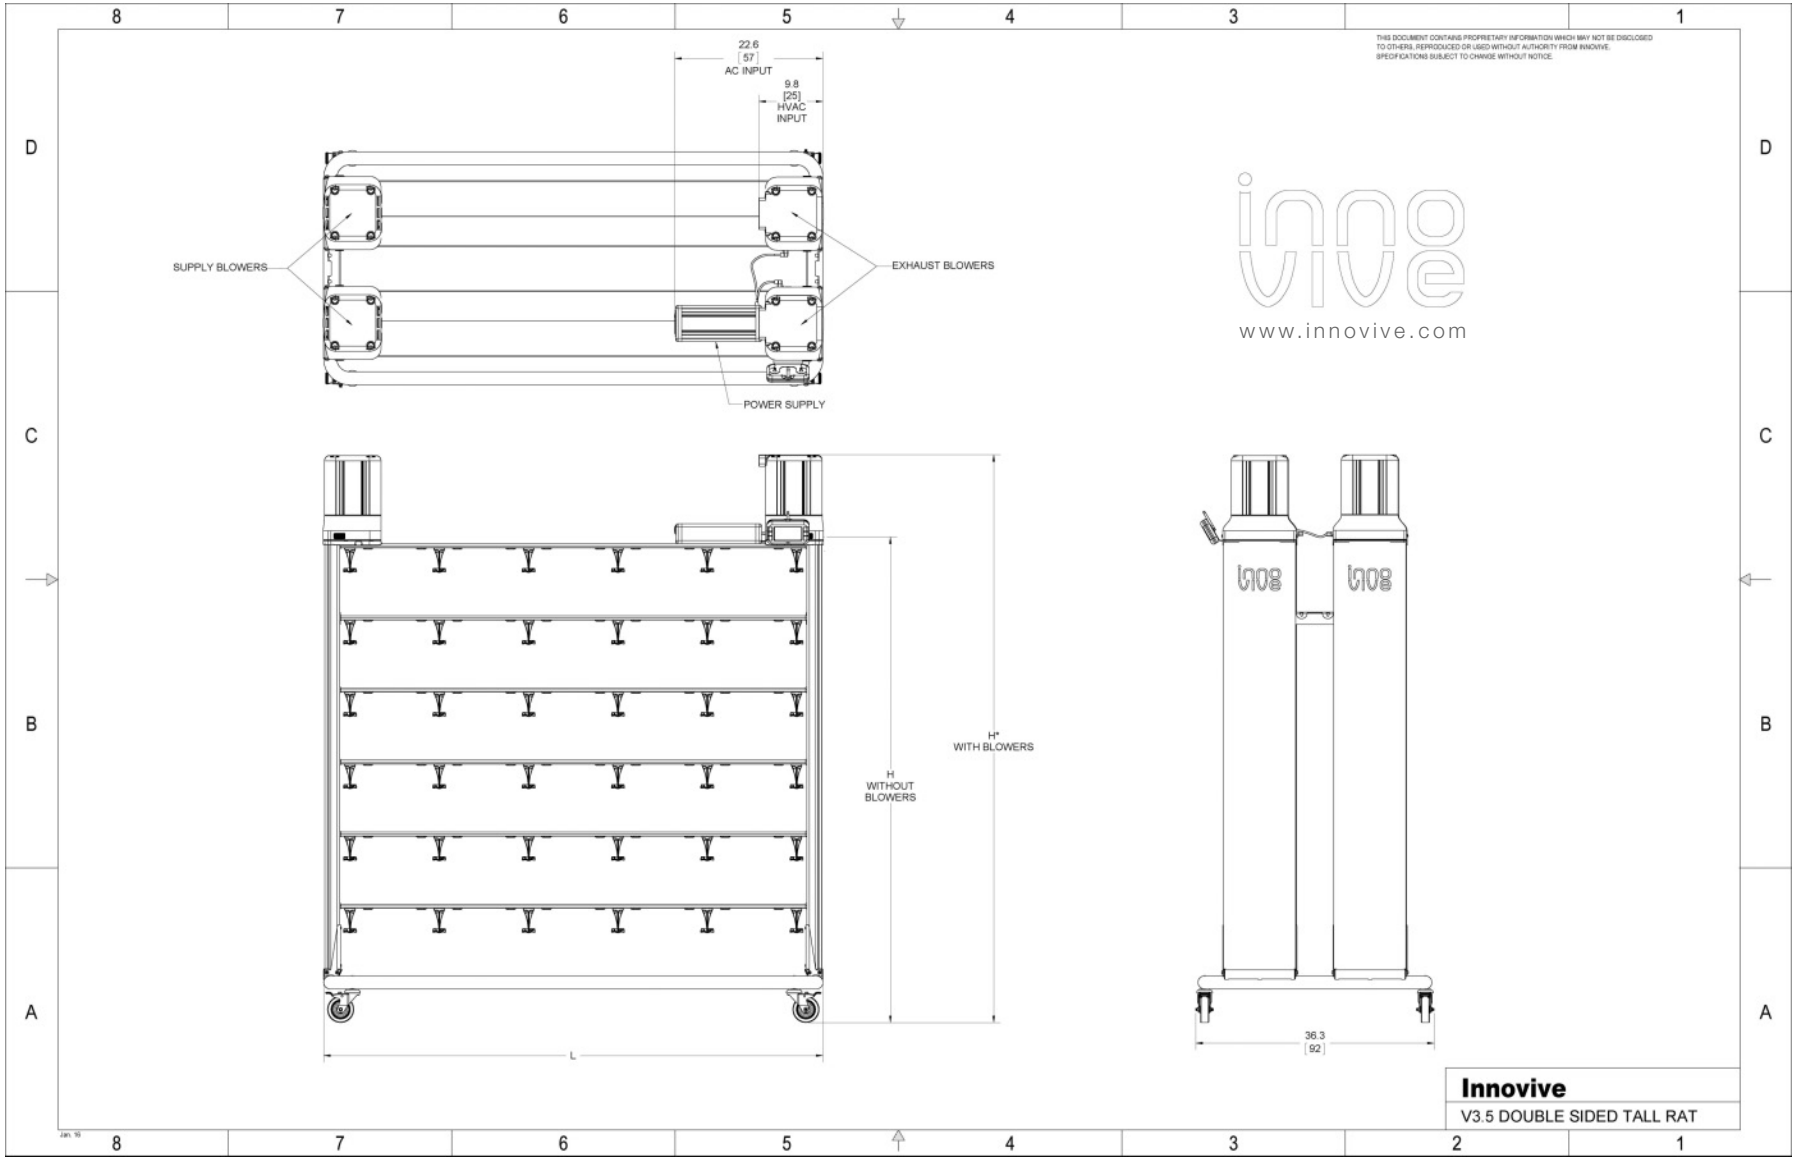PRODUCT CODE	COLUMNS	ROWS	CAGE POSITIONS	LENGTH (L)[3]		HEIGHT WITHOUT BLOWERS (H)[3]		HEIGHT WITH BLOWERS (H*)[3]		WEIGHT WITHOUT CAGES		HVAC [4]
				inches (in)	centimeters (cm)	inches (in)	centimeters (cm)	inches (in)	centimeters (cm)	pounds (lbs)	kilograms (kg)	cubic feet per min (CFM)
RD35T-4-6-48	4	6	48	62.66	159.1	74.50	189.2	89.25	226.7	371	168	166
RD35T-5-5-50	5	5	50	76.25	193.7	63.50	161.3	78.25	198.8	358	163	170
RD35T-5-6-60	5	6	60	76.25	193.7	74.50	189.2	89.25	226.7	410	186	188

Innovive
V3.5 DOUBLE SIDED TALL RAT